

编号 : XMIN2008007495CM_CN

: 2020-08-21 日期

页码 : 1 of 4

客户名称: 武义雄昶五金制造有限公司

客户地址: 浙江省武义县黄龙工业区5路6号

样品名称 条状盲道板

生产商 武义雄昶五金制造有限公司

材质牌号 不锈钢

其他信息 条状盲道板 XC-MDB6011Z

以上信息及样品由客户提供及确认,SGS不承担证实客户提供信息的准确性、适当性和(或)完整性的责任。

收样日期 2020-08-13 2020-08-13 测试开始时间 2020-08-20 测试结束时间 :

请见下页(除另有特别说明外,此报告结果仅对测试样品负责) 测试结果

通标标准技术服务有限公司厦门分公司

检测中心 授权签名

黄文明

授权签字人





编号 : XMIN2008007495CM_CN


日期 2020-08-21

页码 2 of 4

结果总结:

	序号	测试项目	测试方法	结果
Ī	1	斜坡法(油湿状态)	AS 4586-2013 Amdt 1-	临界角平均值: 19.0°
			2017 附录 D	等级:R11
	2	摆锤法摩擦系数	参考 AS 4586-2013 Amdt	SRV "潮湿"=46
	2	1去评仏/手1尔尔奴	1-2017 附录 A	等级:P4

原样照片:

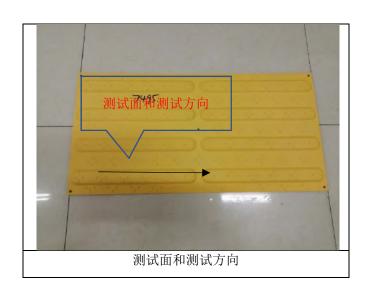



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic focuments, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/

No.31 Xianghong Road, Xiang'An Torch Industrial Zone, Xiamen, Fujian Province, China. 361101 t (86-592) 5765857 f (86-592) 5765380 www.sgsgroup.com.cn 中国·福建·厦门·火炬(翔安)产业区翔虹路31号 邮编:361101 t (86-592) 5765857 f (86-592) 5765380 e sgs.china@sgs.com

f (86-592) 5765380 e sgs.china@sgs.com



编号 : XMIN2008007495CM_CN

日期 : 2020-08-21

页码 : 3 of 4

1.测试项目: 斜坡法(油湿状态)

样品描述: 盲道板, 见照片

测试方法: AS 4586-2013 Amdt 1-2017 附录 D

试样: 600mm×300mm, 2片样品组成1个测试面1200mm×300mm, 见照片

测试面: 见照片 测试方向: 见照片

测试结果:

测试项目	测试结果	等级
防滑(油湿斜坡法)	临界角平均值: 19.0°	R11

人行地面材料油湿斜坡法防滑性等级:

7 (1 · O III) 1 · I I I I I I I I I I I I I I I I I I		
等级	临界角 (度数)	
无等级	X<6°	
R9	6°≤X<10°	
R10	10°≤X<19°	
R11	19°≤X<27°	
R12	27°≤X<35°	
R13	≥35°	



f (86-592) 5765380 www.sgsgroup.com.cn

中国•福建•厦门•火炬(翔安)产业区翔虹路31号

f (86-592) 5765380 e sgs.china@sgs.com



编号 : XMIN2008007495CM_CN

日期 : 2020-08-21

页码 : 4 of 4

2.测试项目:潮湿摆锤防滑性测试

样品描述: 盲道板, 见照片

测试方法:参考 AS 4586-2013 Amdt 1-2017 附录 A

测试条件:

试样: 300mm×300mm, 2片, 切取于原样

滑块型号: slider 96 (4S 橡胶)

测试面:见照片测试方向:见照片

测试结果:

A to to Harter		
样品编号	1	2
BPN 摆锤防滑平均值 (单个测试面)	46	46
测定值	46	
(SRV "潮湿")		
等级	P	4

人行地面材料潮湿摆锤法防滑性等级:

7 114 - 214 1111/4 21	
等级	摆锤防滑值 SRV (slider 96)
P5	>54
P4	45-54
P3	35-44
P2	25-34
P1	12-24
P0	<12

备注: 该检测报告为由 SGS 发布的原检测报告 编号: XMIN2008007495CM 日期: 2020 年 8 月 21 日的中文译本,本报告仅供参考。

******** 报告结束*******

在中华人民共和国境内,报告加盖 CMA 标识,表示检测项目在资质认定范围内:未加盖 CMA 标识,表示部分/全部检测项目未在 CMA 资质认定范围内,结果仅供内部参考。



one's contenting agreed in writing, this document is issued by the Company surject to its General Conditions or service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.agpx. And for electronic format documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-End-Ferms-and-Conditions-Ferms-and-Conditions-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-Ferms-and-Conditions-End-Ferms-and-Conditions-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Conditions-End-Ferms-and-Ferms-and-Ferms-and-Conditions-End-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-Ferms-and-

|No.31 Xianghong Road, Xiang/An Torch Industrial Zone, Xiamen, Fujian Province, China. 361101 t (86-582) 5765857 f (86-592) 5766380 www.sgsgroup.com.cn 中国・福建・厦门・火炬(翔安)产业区翔虹路31号 邮编:361101 t (86-592) 5765857 f (86-592) 5765880 e sgs.china@sgs.com